



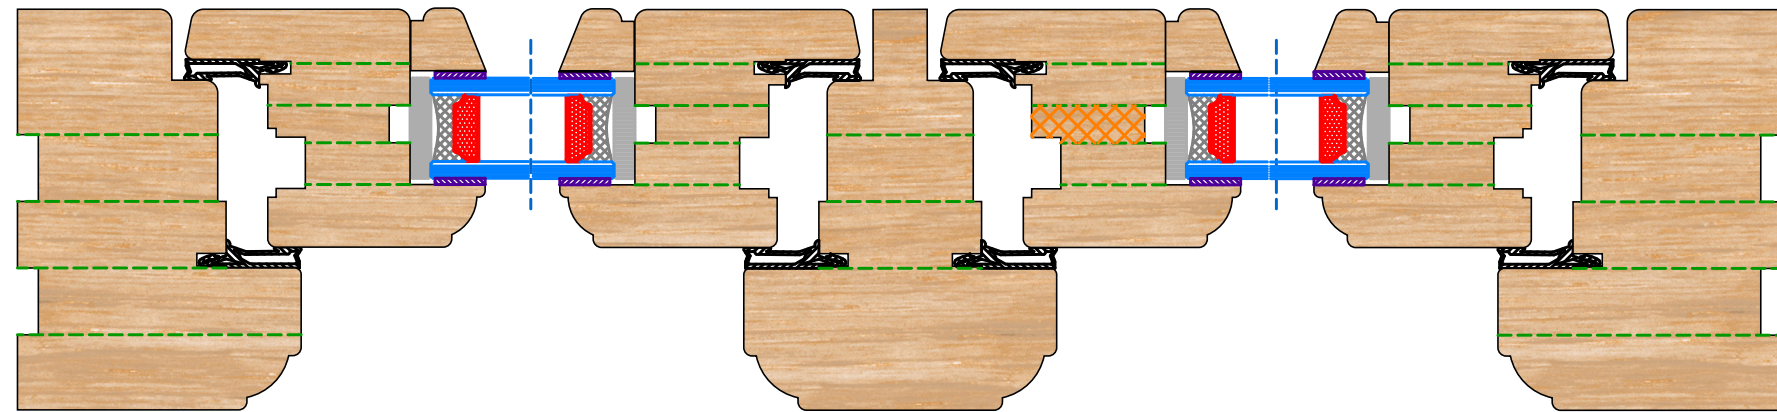

Whitehill

HP FLUSH WINDOW TOOLING SYSTEM

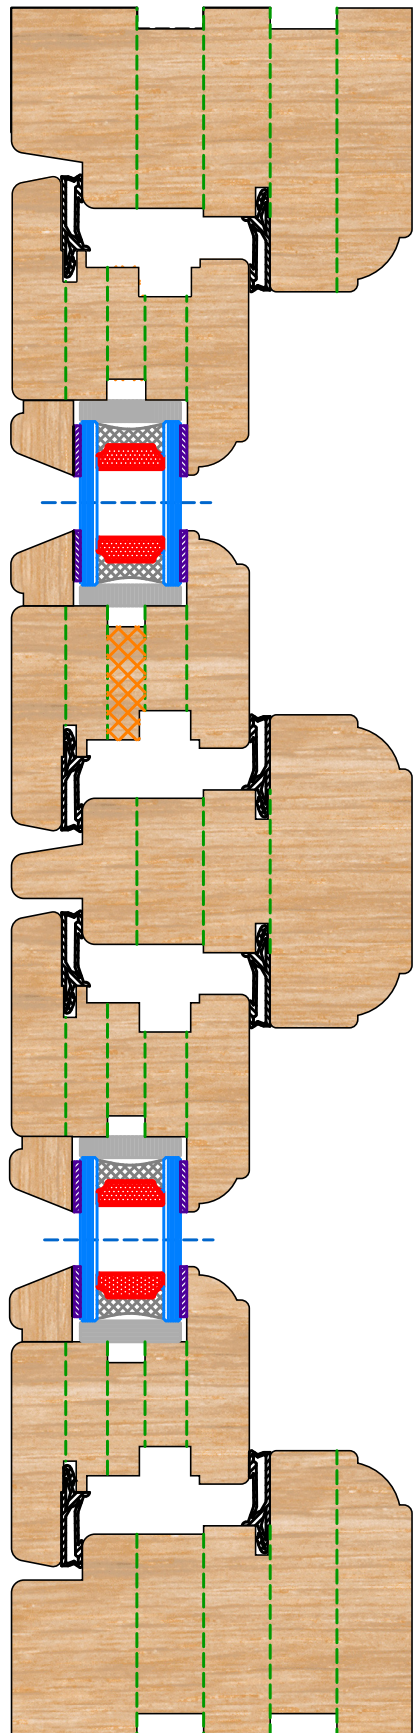


Key Features


- 96 x 68mm frame section
- 72 x 57 sash section
- Combe jointed sash section
- Single tenon and combe joint options available
- Lambs tongue, radius and square finishes available
- 3mm grooves in frames for standard weather seals
- Part Q (Pas 24) certified

PART
Q
CERTIFIED


Inside Sash Mould

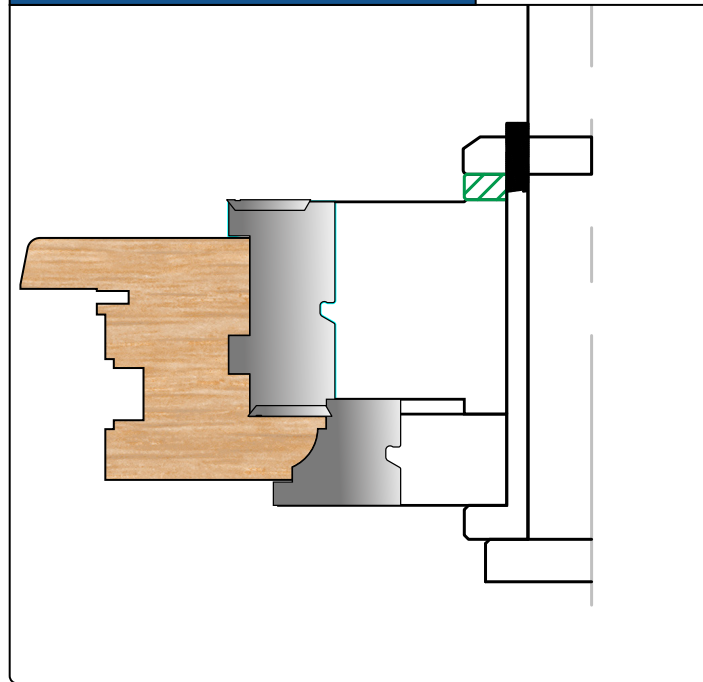


Outside Sash Mould

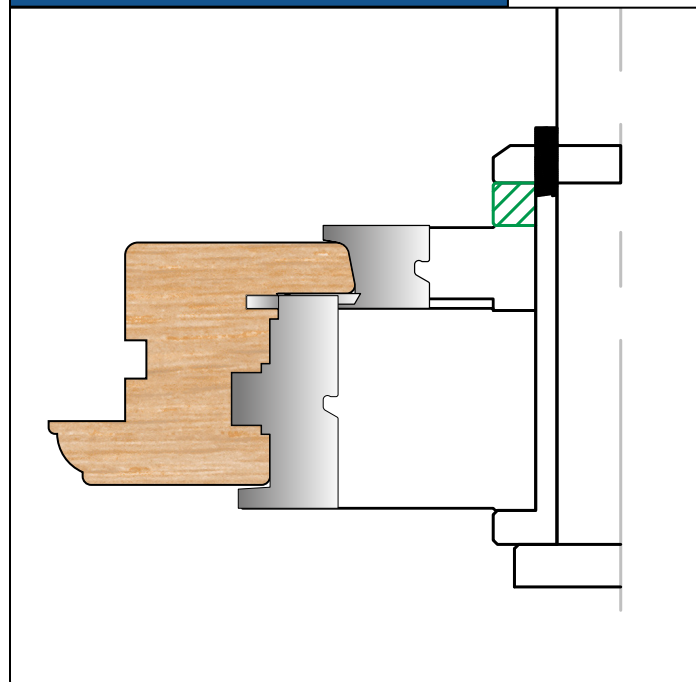


Sash Top/Bottom Rail

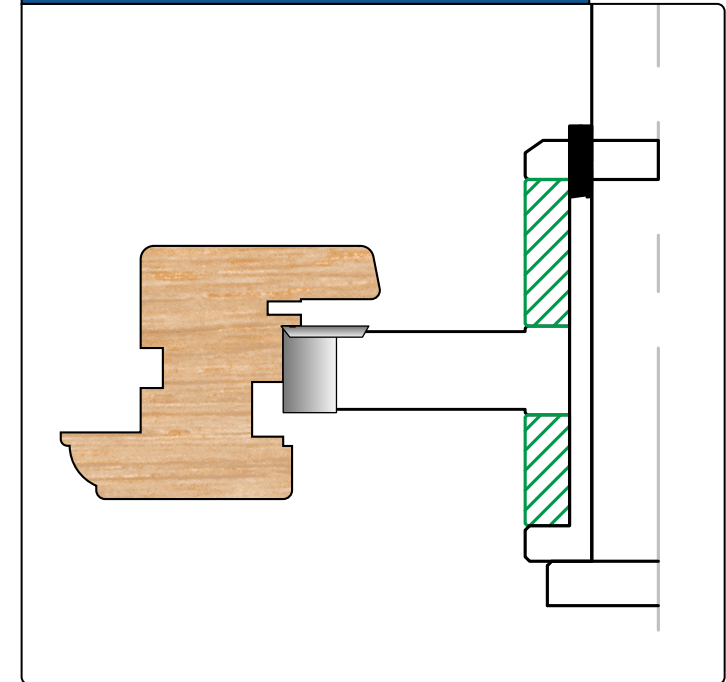


Sash Combe Mould

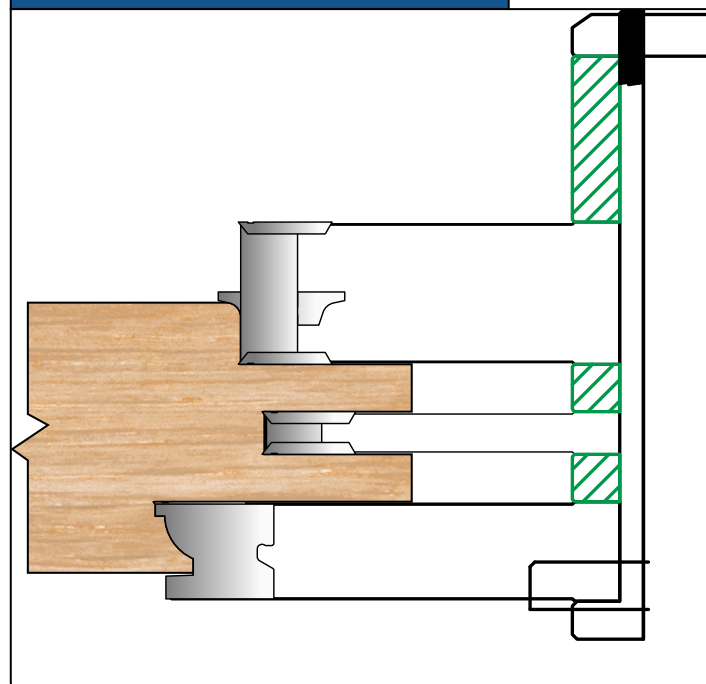


Sash Combe Slots

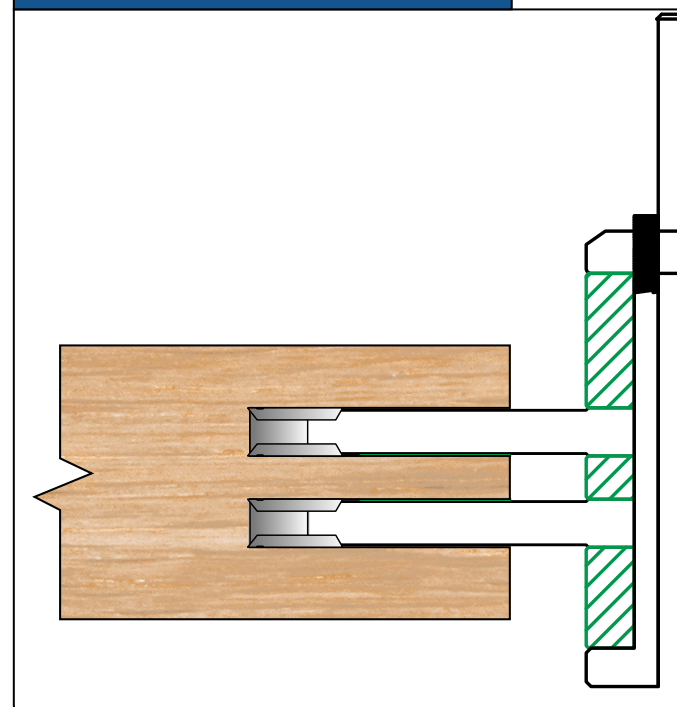

Frame Mould

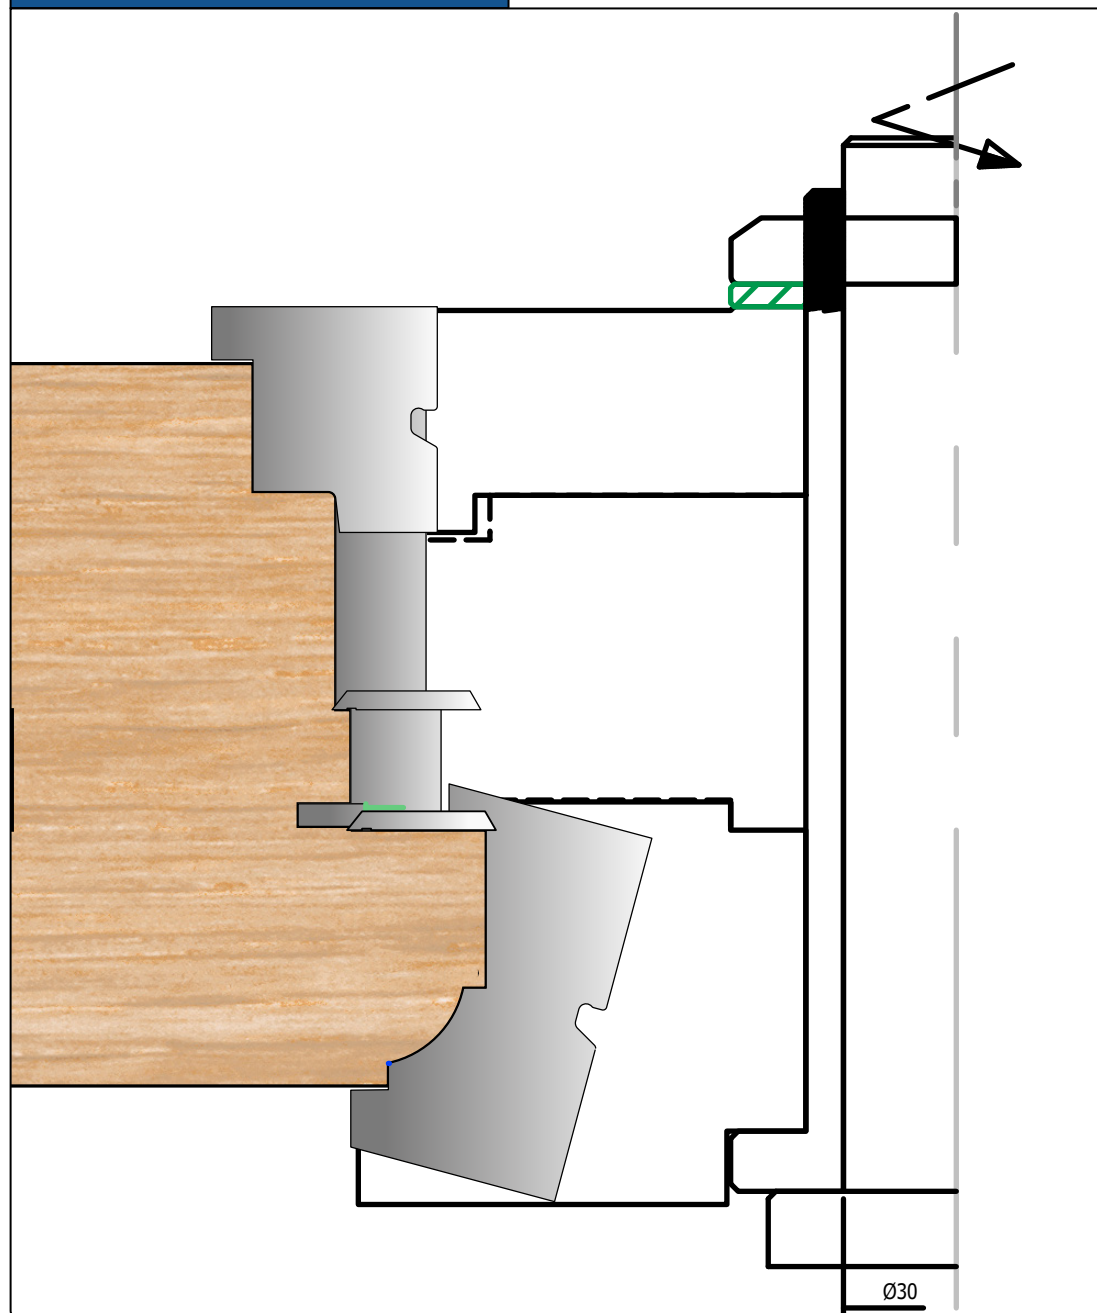


Frame Mould Cill

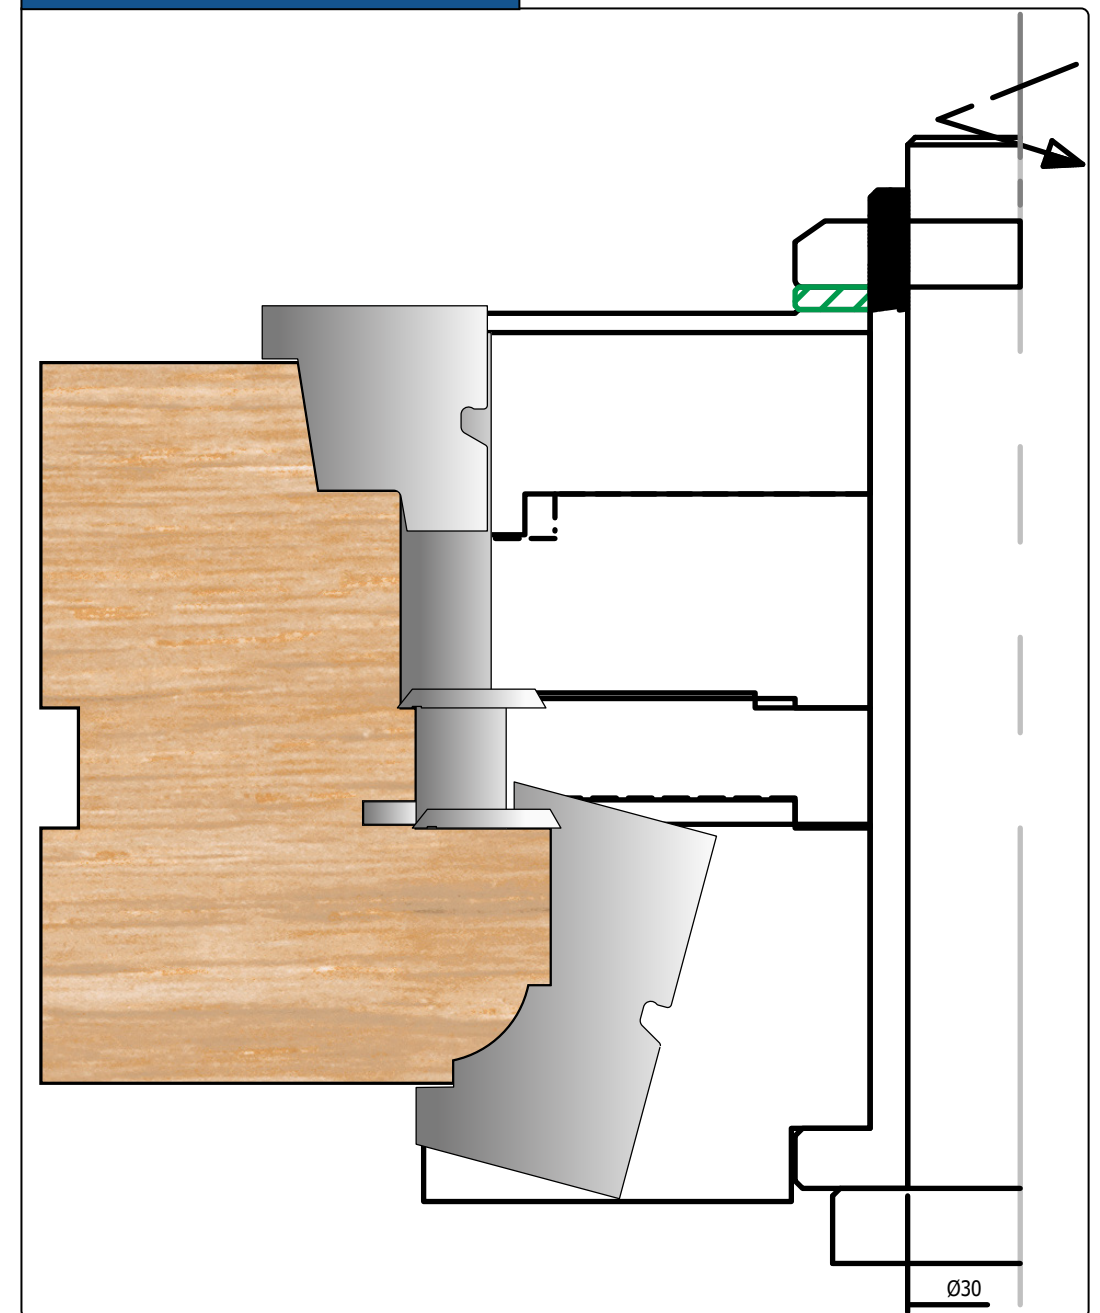


Single Tenon Frame Tooling


Frame Single Tenon Scribe

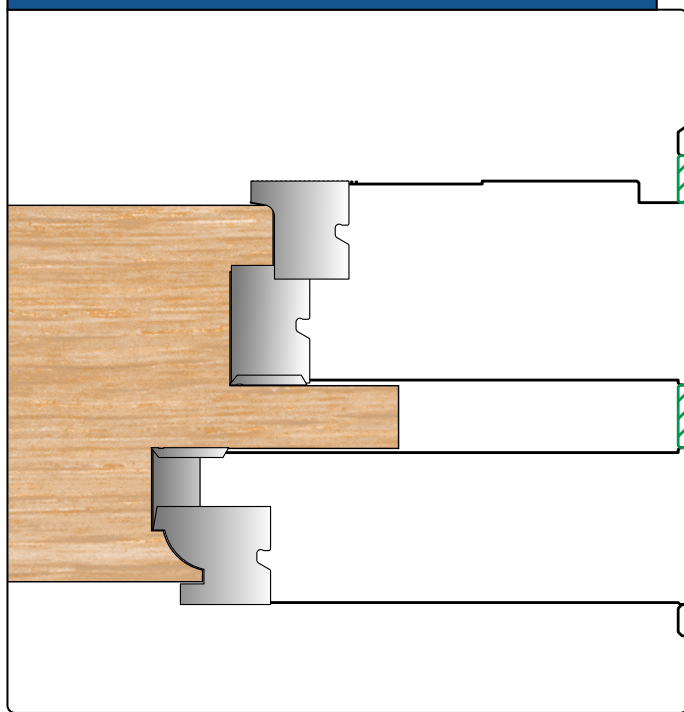

Frame Single Tenon Scribe Cill

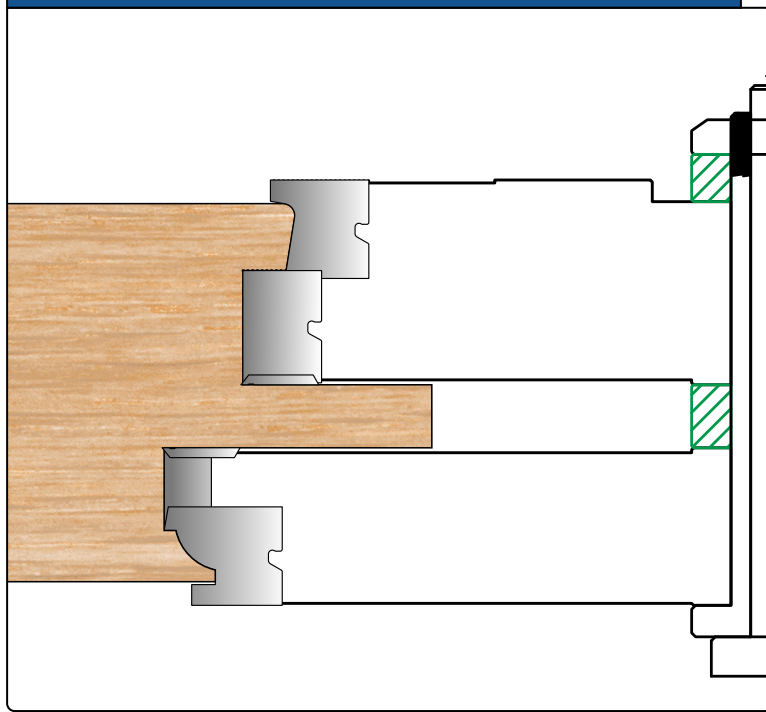


Frame Single Tenon Slot

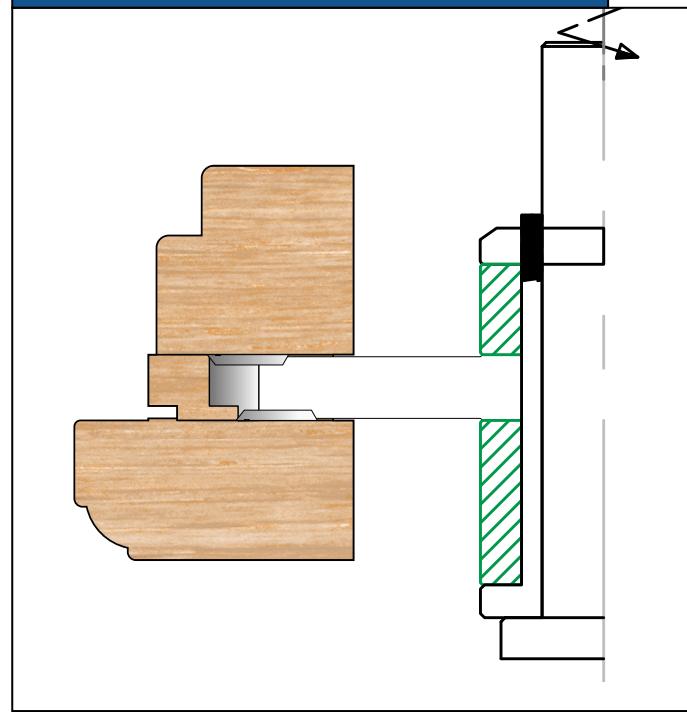


Combe Joint Frame Tooling

Frame Combe Joint Scribe

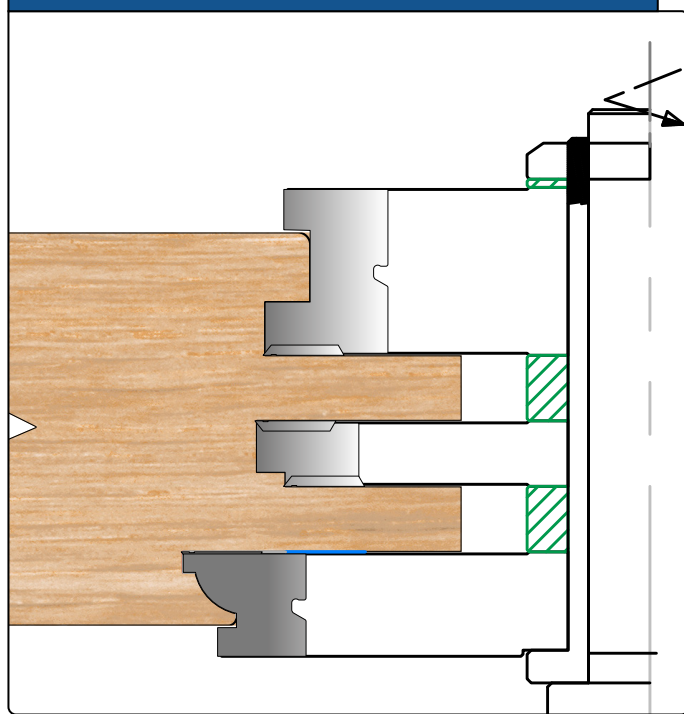

Frame Combe Joint Scribe Cill

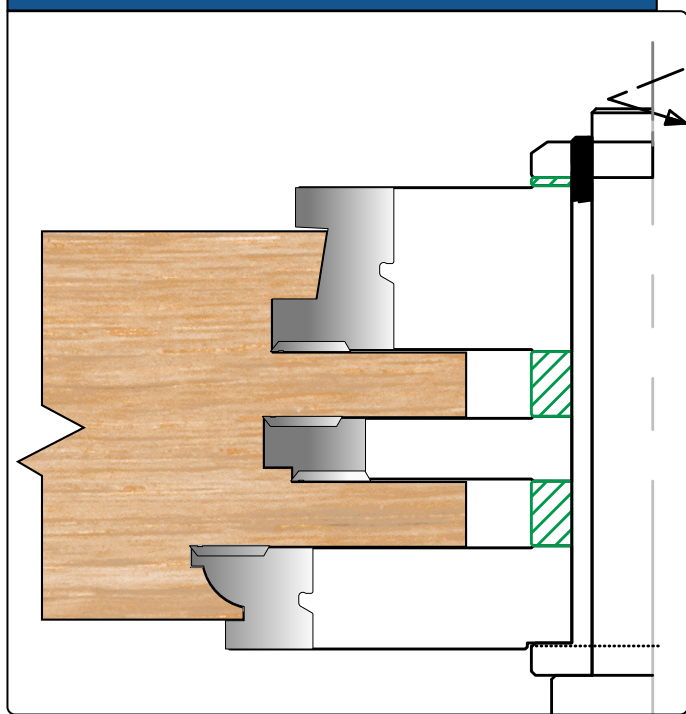

Frame Combe Joint Tenon Slots

